

- **Manual Dimmer**
0-10V Control Port
Input 220-240V AC
- **Built-in driver**
Durable and reliable power source, all in one design.
- **PC Cover**
Protect the fixture chips from the influence of growing environment



Specifications

Input Voltage: 220-240 Volt AC

Rated Power: 250W±5%

Current Consumption: 1.0A-1.1A at 250w

Power factor: 0,98

LED: LEDESTAR

PPF Efficacy: 2.7 umol/J

BTU: 850

IP Rating: IP44

Product dimensions (LxWxH): 600*400*38mm

Package dimensions (LxWxH): 410*50*630mm

Gross Weight: 3.5kg

Operating Temperature: -25-40°C

Control: Manual Dimming System, Compatible with Ralight Controller

External Dim: Yes with Ralight Controller


External Dim Connector Rj14 Connector Build in 2x

Housing Material: Aluminum

Lifetime: 50,000H

Warranty: 2 Years

Spectrum

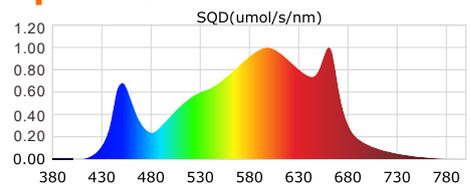

PAR Distribution

Height of 30cm

22	47	81	82	48	24
44	148	359	376	155	49
71	307	990	1041	359	87
69	329	987	1045	382	87
45	160	402	406	172	52
23	50	86	97	52	23

120CM

Height of 60cm

56	94	129	129	95	58
89	171	258	263	175	96
120	246	395	401	262	132
118	255	395	399	266	131
89	178	268	265	181	99
57	97	131	138	99	59

120CM

Height of 90cm

65	91	112	112	92	67
89	132	168	168	132	91
107	164	210	211	166	112
106	165	209	211	168	112
89	134	168	167	135	93
65	92	109	113	92	66

120CM