

- **Manual Dimmer**
0-10V Control Port
Input 220-240V AC
- **Built-in driver**
Durable and reliable power source, all in one design.
- **PC Cover**
Protect the fixture chips from the influence of growing environment



Specifications

Input Voltage: 220-240 Volt AC

Rated Power: 720W±5%

Current Consumption: 3.0A-3.3A at 720W

Power factor: 0,98

LED: LEDESTAR

PPF Efficacy: 2.7 umol/J

BTU: 2448

IP Rating: IP44

Product dimensions (LxWxH): 900*900*38mm

Package dimensions (LxWxH): 995*95*485mm

Gross Weight: 8.5kg

Operating Temperature: -25-40°C

Control: Manual Dimming System, Compatible with Ralight Controller

External Dim: Yes with Ralight Controller

External Dim Connector Rj14 Connector Build in 2x


Housing Material: Aluminum

Lifetime: 50,000H

Warranty: 2 Years



Spectrum

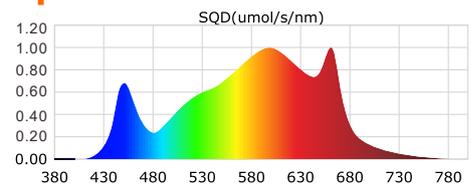

PAR Distribution

Height of 30cm

124	258	303	309	256	122
282	743	869	865	755	302
384	1027	1198	1201	1040	421
371	999	1180	1082	1026	416
274	718	850	841	728	301
111	240	291	300	247	125

120CM

Height of 60cm

181	270	319	322	267	178
278	445	530	526	439	281
341	556	674	674	559	353
336	545	671	669	554	350
270	431	521	521	425	278
169	260	311	312	259	178

120CM

Height of 90cm

171	225	253	252	221	166
223	304	346	342	300	226
256	353	405	405	349	259
253	350	406	404	349	258
219	295	341	341	293	222
163	216	247	249	215	166

120CM